


## SAFETY FIRST:

If you are collecting the equipment for someone else please make sure this sheet is given to the equipment user to read. In accordance with Health and Safety in Employment Act requirements, this sheet should be given to the site supervisor if the equipment is being hired for use at a commercial worksite so that the information is available to all users.



## Required Safety Equipment

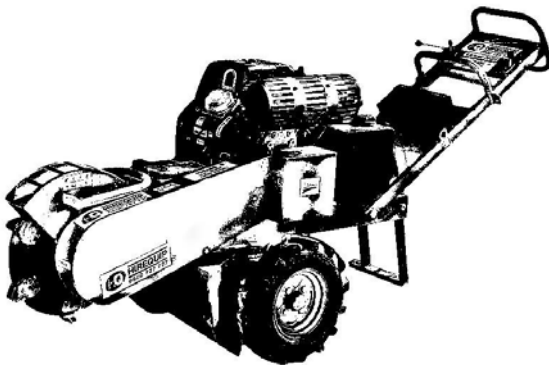

Ear Muffs



Hard Hat



Gloves



Boots



Protective Clothing



Face Shield



Visual Inspection

## Pre Start Checks and Safety

- ! Check fuel tank is full of appropriate fuel
- ! Check engine oil level
- ! Check belt tension (3/16" deflection)
- ! Check cutting teeth (missing and tightness 110ft/LBS)
- ! Proper brake operation
- ! Lubrication points greased
- ! Check the area surrounding the stump for stones, steel, wire etc
- ! Check the stump for embedded foreign objects
- ! Check for underground services
- ! Clear the work area of people not involved
- ! Do not spill fuel
- ! Do not leave machine running unattended

## When Operating

Place cutter wheel directly in front of stump  
Pull throttle full on  
Move handle back and forth (left and right) allowing the cutter to grind the stump with each pass  
When needed unlock brake  
Push grinder further into stump  
Continue grinding

## Starting procedure

Turn on petrol  
Cold start choke engine  
Set throttle to 1/2 OPEN  
Ensure (Push pull) switch is in the "ON" position  
Lock park brake  
Push down handle so that cutter wheel is off the ground  
Pull start cord until a slight resistance is felt  
Give short sharp pulls  
When engine fires or starts  
Open choke  
Re pull start if required  
Idle engine

## Stopping and After Use

Allow engine to idle and cool down  
Turn OFF engine switch.  
Turn OFF petrol.