


### SAFETY FIRST:

If you are collecting the equipment for someone else please make sure this sheet is given to the equipment user to read. In accordance with Health and Safety in Employment Act requirements, this sheet should be given to the site supervisor if the equipment is being hired for use at a commercial worksite so that the information is available to all users.

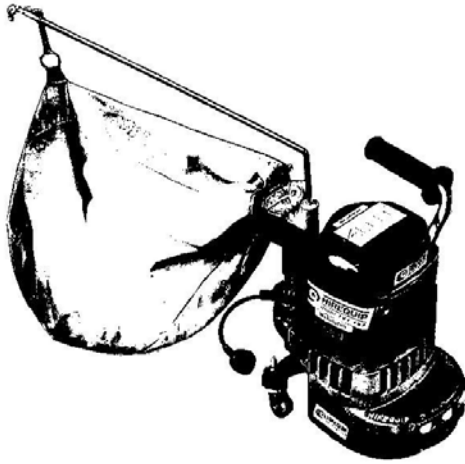

### Pre Start Checks and Safety Con't

- ! Always use dust bag and empty frequently
- ! Never touch the sanding disc while power cord is plugged in
- ! Keep power cords clear of area being worked
- ! Don't wear loose clothing

### Required Safety Equipment



### When Operating

Hold the machine flat on to the floor  
Keep the machine moving and tilt backwards at the end of a run  
Holding the machine in one place will groove the floor

### Pre Start Checks and Safety

- ! Ensure the machine has a current Electrical Code of Compliance
- ! Ensure dust bag and paper clamping disc key are with machine
- ! Ensure you have adequate sanding paper to complete the job
- ! Ensure transformer or a residual current device (RCD) unit is used
- ! Ensure electric extension lead is in good condition and positioned safely
- ! Ensure machine is switched off before plugging into mains power supply
- ! Unplug machine from mains power supply when changing sanding disc

### Starting procedure

Grasp the hand grips and tilt the machine backwards to raise the sanding disc from the floor  
Switch on and let the motor build up speed  
Lower the sanding disc slowly on to the floor

### Stopping and After Use

Tilt machine off the floor  
Switch off and allow disc to stop turning before placing machine back down  
Unplug power lead and RCD unit  
Empty dust bag  
Remove used sanding disc