


SAFETY FIRST:

If you are collecting the equipment for someone else please make sure this sheet is given to the equipment user to read. In accordance with Health and Safety in Employment Act requirements, this sheet should be given to the site supervisor if the equipment is being hired for use at a commercial worksite so that the information is available to all users.



Required Safety Equipment

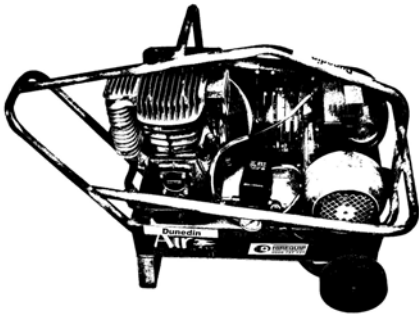

Ear Muffs



Gloves



Boots



Protective Clothing



Face Shield



Visual Inspection

Pre Start Checks and Safety

- ! Ensure the machine has a current Electrical Code of Compliance
- ! Use unit as near as possible to power supply (maximum length of power extension lead must not exceed 20 metres as this results in voltage drop to motor)
- ! Ensure a transformer or residual current device (RCD) unit is used
- ! Check oil level in compressor unit
- ! Position on a level surface
- ! Ensure the air tank is empty of air
- ! Employ safe working practices
- ! Use the correct size hosing to suit the job
- ! Never use frayed, damaged or deteriorated hose
- ! Never use compressed air for breathing unless used through a filtration unit

Pre Start Checks and Safety Con't

- ! Compressed air is dangerous, treat with extreme care
- ! Never blow compressed air onto or at body areas
- ! Never allow air to blow through a loose ended hose
- ! Ensure hose end is secured

When Operating

Connect air supply lines to the outlet tap and to the appliance/tool being used
Open air outlet tap

Starting procedure

Plug transformer or residual current device unit (RCD) into power supply
If an extension lead is required make sure it is of good quality/condition and no longer than 20 metres
Plug compressor into power supply/lead
On some models the compressor will start automatically when the power supply is switched on.
Other models have a on/off switch on the unit

Stopping and After Use

Close air outlet tap
Turn off compressor at switch or by unplugging power
Discharge air from hose and appliance/tool
Disconnect hoses and roll up