

### SAFETY FIRST:

If you are collecting the equipment for someone else please make sure this sheet is given to the equipment user to read. In accordance with Health and Safety in Employment Act requirements, this sheet should be given to the site supervisor if the equipment is being hired for use at a commercial worksite so that the information is available to all users.

### Required Safety Equipment



Ear Muffs



Goggles



Hard Hat




Boots



Gloves



Visual Inspection

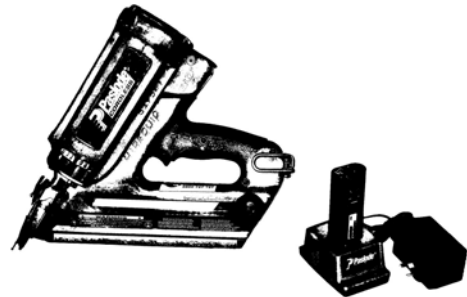

### Pre Start Checks and Safety

- ! Ensure correct sized nails/staples for the gun and job
- ! Check worksite for hazards etc
- ! Do not adjust gun unless disconnected from air supply
- ! Check safety mechanism is operating correctly
- ! Do not tamper with the safety mechanism or other mechanical parts
- ! Do not engage in horseplay as the gun can inflict fatal injuries
- ! Ensure no other person is in direct firing line with the gun unit
- ! Ensure there are no hidden cables, pipes etc
- ! Never assume tool is empty
- ! Never point the tool at anyone
- ! Never carry your tool with your finger on or depressing the trigger
- ! Never operate a tool that has malfunctioned
- ! Never attempt to clear jams before removing the fuel cylinder and battery
- ! Do not store fuel cells above 120°F (49°C)
- ! Never puncture, incinerate, crush or refill fuel cells
- ! Always remove fasteners, fuel and battery cell before storage
- ! Keep the tool clean
- ! Keep your hands away from area being fastened
- ! Always keep tool, fuel, battery and charger away from children

### Battery Charging

Plug transformer unit into a 240V outlet and switch on

Plug outlet lead from transformer into charger unit

Insert battery into the charger with the terminals down (the red light will come on indicating the battery is charging and the green light will go out)

Once charged the red light will go out and the green light will come on

**Charging Times:** Minimum 5 minutes to 2 hours for a fully discharged battery

### Inserting Battery, Fuel Cell and Fasteners

Insert the battery into the gun and push forward into it's locked position

Open the fuel cell compartment by pressing up then pulling out

With the gas outlet stem pointing towards the front of the gun insert the cell assembly

Close the rear cover

Pull the follower handle back to the rear lock position (button will pop out and hold back)

Insert a strip of fasteners and release the follower by pushing on the button

### When Operating

Firmly hold gun against timber to be fastened (you will hear the fan motor start and fuel is injected into the chamber)  
Pull trigger

**Depth Drive Adjustment:** This can be adjusted with the mechanism on the front of the gun (ensure battery and fuel cell are removed before adjusting)